




FICHA TÉCNICA

Artículo : 1800 5901 - 1800 5908
ANILLA ELEVACION HEMBRA DIN 582 INOX A2

DIN 582 **CE**



CMU Carga máxima de utilización

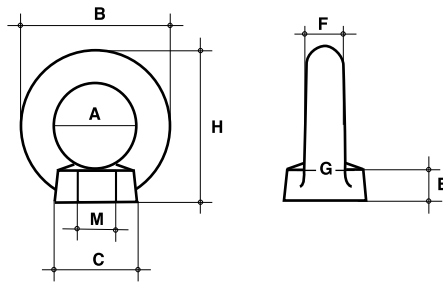

N.m^o Par de apriete máximo

Cáncamo de elevación hembra

Acero: C15E (0,025%-0,050% Al)

Acabado cincado blanco

Coefficiente de seguridad = 6

Ref.	M	A	B	C	E	F	G	H	CMU (Kg)	CMU (Kg)	CMU (Kg)	N.m _{max}	Kg.
18005901	M6*	20	36	20	8,5	8	10	36	90	60	45	3,5	0,06
18005902	M8	20	36	20	8,5	8	10	36	140	100	70	8	0,06
18005903	M10	25	45	25	10	10	12	45	230	170	115	16	0,10
18005904	M12	30	54	30	11	12	14	53	340	240	170	28	0,17
18005905	M14*	30	54	30	11	12	14	53	500	350	250	45	0,15
18005906	M16	35	63	35	13	14	16	62	700	500	350	70	0,26
18005908	M18*	35	63	35	13	14	16	62	930	650	465	95	0,24