




FICHA TÉCNICA

Tornillo hexagonal rosca parcial negro

Referencia: 0006 + Medida NEGRO
PASO FINO

DIN 960

CLASE 8.8

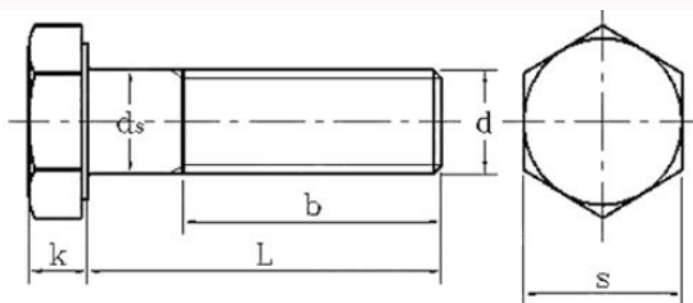

Thread, d	P	b			ds			K				S		
					MAX	MIN		A		B		MAX	MIN	
		L ≤ 125	125 < L ≤ 200	L > 200		A	B	MAX	MIN	MAX	MIN		A	B
M8	1	22	28	41	8	7.78	7.64	5.45	5.15	5.54	5.06	13	12.73	12.57
M10	1/1.25	26	32	45	10	9.78	9.64	6.58	6.22	6.69	6.11	17	16.73	16.57
M12	1.25/1.5	30	36	49	12	11.73	11.57	7.68	7.32	7.79	7.21	19	18.67	18.48
M14	1.5	34	40	53	14	13.73	13.57	8.98	8.62	9.09	8.51	22	21.67	21.16
M16	1.5	38	44	57	16	15.73	15.57	10.18	9.82	10.29	9.71	24	23.67	23.16
M18	1.5/2	42	48	61	18	17.73	17.57	11.72	11.28	11.85	11.15	27	26.67	26.16
M20	1.5/2	46	52	65	20	19.67	19.48	12.73	12.28	12.85	12.15	30	29.67	29.16
M22	1.5/2	50	56	69	22	21.67	21.48	14.22	13.78	14.35	13.65	32	31.61	31
M24	1.5/2	54	60	73	24	23.67	23.48	15.22	14.78	15.35	14.65	36	35.38	35
M27	2	60	66	79	27	26.48		17.35	16.65	17.35	16.65	41	40	
M30	2	66	72	85	30	29.48		19.12	18.28	19.12	18.28	46	45	
M33	2	72	78	91	33	32.38		21.42	20.58	21.42	20.58	50	49	
M36	3	78	84	97	36	35.38		22.92	22.08	22.92	22.08	55	53.8	
M39	3	84	90	103	39	38.38		25.42	24.58	25.42	24.58	60	58.8	
M42	3	90	96	109	42	41.38		26.42	25.58	26.42	25.58	65	63.1	
M45	3	98	102	115	45	44.38		28.42	27.58	28.42	27.58	70	68.1	
M48	3	102	108	121	48	47.38		30.42	29.58	30.42	29.58	75	73.1	
M52	3	/	116	129	52	51.28		33.5	32.5	33.5	32.5	80	78.1	
M56	4	/	124	137	56	55.26		35.5	34.5	35.5	34.5	85	82.8	
M60	4	/	132	145	60	59.26		38.5	37.5	38.5	37.5	90	87.8	
M64	4	/	140	153	64	63.26		40.5	39.5	40.5	39.5	95	92.8	
M68	4	/	148	161	68	67.26		43.5	42.5	43.5	42.5	100	97.8	
M72	4	/	156	169	72	71.26		45.5	44.5	45.5	44.5	105	102.8	
M76	4	/	164	177	76	75.26		48.5	47.5	48.5	47.5	110	107.8	
M80	4	/	172	185	80	79.26		50.5	49.5	50.5	49.5	115	112.8	
M90	4	/	192	205	90	89.13		57.6	56.4	57.6	56.4	130	127.5	
M100	4	/	/	225	100	99.13		63.6	62.4	63.6	62.4	145	142.5	