



FICHA TÉCNICA

Referencias: 09512203; 09512204; 09512205; 09512206; 09512207; 09512208; 09512209; 09512210; 09512211; 09512212; 09512213; 09512214; 09512215; 09512216; 09512217; 09512218; 09512219; 09512220; 09512221; 09512222; 09512223; 09512224; 09512225

Llave de estrella de impacto | En medidas desde la SW 24 hasta la SW 120 | Fabricada en acero al cromo vanadio extrafuerte



cofan

Llave de impacto de estrella.

Medidas desde sw 24 hasta sw 120.

Para montajes especialmente difíciles y con altas exigencias de par de apriete.

Fabricada en acero Cromo vanadio fosfatado de alta resistencia.

Frecuente y solicitada en los talleres mecánicos, esta llave de impacto reducirá sus esfuerzos para aflojar y apretar tuercas o tornillos.

Para montajes especialmente difíciles y con altas exigencias de par de apriete




FICHA TÉCNICA

Ref	M	
0951 2203	24	1
0951 2204	27	1
0951 2205	30	1
0951 2206	32	1
0951 2207	36	1
0951 2208	41	1
0951 2209	42	1
0951 2210	46	1
0951 2211	50	1
0951 2212	55	1
0951 2213	60	1
0951 2214	65	1
0951 2215	70	1
0951 2216	75	1
0951 2217	80	1
0951 2218	85	1
0951 2219	90	1
0951 2220	95	1
0951 2221	100	1
0951 2222	105	1
0951 2223	110	1
0951 2224	115	1
0951 2225	120	1



FICHA TÉCNICA

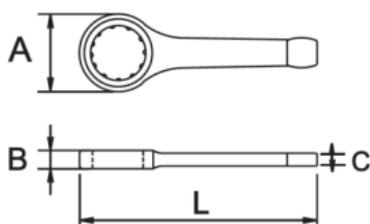

referencia	boca [mm]	L	A	B	C	peso [kg]
0951 2203	24	165	42	14	9	0,2
0951 2204	27	175	46	16	10	0,3
0951 2205	30	185	55	19	11	0,4
0951 2206	32	185				0,5
0951 2207	36	210				0,6
0951 2208	41	230	65	20	12	0,7
0951 2209	42		75	22	13	1
0951 2210	46		80	23	14	1,2
0951 2211	50	250	85	24	15	1,4
0951 2212	55	270	90	26		1,6
0951 2213	60	300	100	30	16	1,9
0951 2214	65	320	105	32	17	2,3
0951 2215	70	330	115	33	18	2,9
0951 2216	75	350	125	34	19	3,6
0951 2217	80	360	130	36	20	3,9
0951 2218	85	390	145	39	23	7,5
0951 2219	90	420	160	43	25	9,5
0951 2220	95		170	45	28	
0951 2221	100		180	50	30	
0951 2222	105	450	170	45	28	11
0951 2223	110					
0951 2224	115					
0951 2225	120	480	180	50	30	11

MATERIAL	Acero especial
DUREZA	de 17mm a 46mm: 34 – 40 HRC de 50mm a 150mm: 30 – 36 HRC
ACABADO	Epoxy polvo negro mate semitexturizado